

Flame Grill: 60"

Our Afoheat™ Flame Grill series offers searing, roasting, and bar marking solutions with gas-powered direct flame technology and integrated optional bar markers. Through multiple adjustable ribbon burners our Flame Grills offer a truly flame seared product with maximum cooking efficiency and flexibility, along with improved yields and a boost in product quality.

The 60" Flame Grill is designed for processors with capacity requirements up to 20,000 lbs (9,071 kg) / hr.



Afoheat™ Flame Grill 60"

Benefits/Features:

- Direct flame completely envelops the product to rapidly seal in moisture
- Twenty four independently controlled burners allow for complete control of color development across the product and between (optional) grill marks
- Small footprint, comparatively large throughput
- Flexibility across product applications to grill, bar mark, braise, roast, and color
- Can be used as a standalone unit for simple searing or integrate into a full-cook processing line
- Easy to use HMI screen allows for recipe creation for consistent results, every time
- Built to USDA accepted sanitary design standards
- CE compliant



Our Flame Grills are designed to be placed prior to the cooking apparatus. This allows the direct flame to rapidly sear in juices that would otherwise be lost, while also improving color and flavor profiles of the product. By placing the grill first, the energy required for bar marking contributes to the cooking process, improving overall plant and line efficiency. Our unique heat shield design intensifies heat in the product zone, maximizing capacity and minimizing energy use.

Individual burners can be set "on" or "off" and adjustments can be made to their flame angle, intensity, and distance from the product, to meet exact specifications. Meanwhile the integrated bar marker has three settings: up, down, or neutral.

Interchangeable belts and bar markers provide users with maximum flexibility, to run large whole products or diced products on the same machine with varying char marking patterns.

Product Specifications:

Model	Belt Width	Burners	Capacity Range	Machine Length	Machine Width	Machine Height	Machine Weight
60"	60" 1500 mm	24	20,000 lbs/hr 9,071 kg/hr	20.17' 6.15 m	8.67' 2.64 m	8.17' 2.49 m	10,000 lbs 4,535 kg

Utility Specifications:



Model	Electrical Power Utilities	Gas Utilities	Drains	Extraction	Cleaning Water
60"	USA: 480 VAC, 3 Ph, 42 Amp, 60 Hz EUR: 380 VAC, 3 Ph, 53 Amp, 50 Hz AUS: 415 VAC, 3 Ph, 48 Amp, 50 Hz	Up to 5.0 MBTU/Hr at 2 PSI (7 PSI max); 2" (50 mm) NPT	Overflow – 3" (75 mm) Sanitary	2 x 28" (2 x 711 mm) Outlet; Up to 14,000 CFM (396 m³/min) Total	1/2" (12 mm) NPT inlet; Up to 60 GPH (227 liter/hr)

Accessories:

- Preheat extension to achieve double sided bar marking in one pass, must be added at the time of purchase
- Charcoal trays
- Steam impingement manifolds
- Discharge roller bar to prevent products from sticking to the belt
- Rod, wire, or mesh belt
- Standard, diamond, branded, or solid bar marker
- Infeed or outfeed belt extension



Technical Diagram:

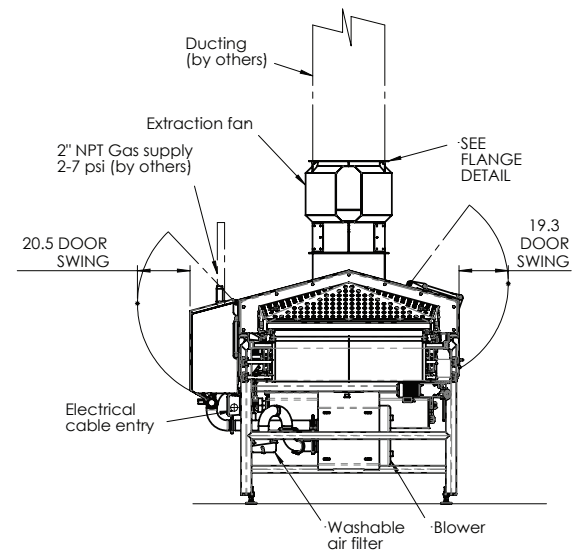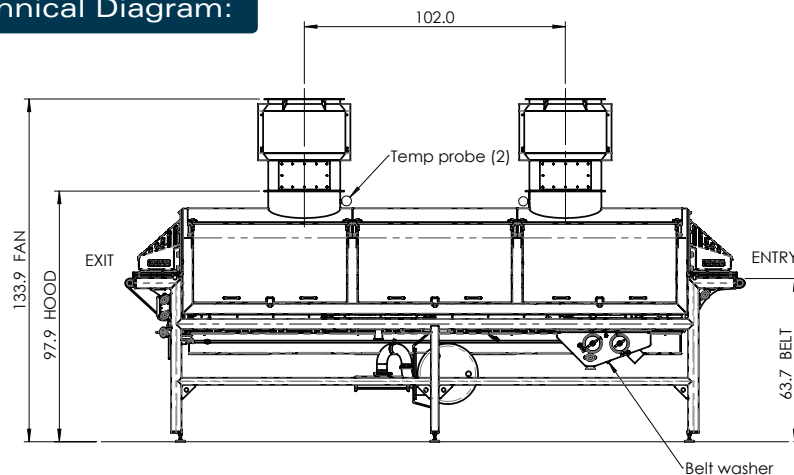

4780 NW 41st St, Ste. 100 • Riverside, MO 64150

Tel 913.888.3333 | Toll Free 800.862.7536 | Fax 913.888.6440 | email: sales@marlen.com | www.marlen.com



MARLEN INTERNATIONAL IS A MEMBER OF THE DURAVANT FAMILY OF COMPANIES

PACKAGING SOLUTIONS | FOOD PROCESSING SOLUTIONS | MATERIAL HANDLING SOLUTIONS | SUPPORTPRO

www.duravant.com