

SPECIFICATIONS



Horizontal Slicer at right, featured with DuraKut 6000 2D Dicer and custom conveyor at left

FEATURES

- MADE IN THE USA WITH CENTRALLY LOCATED PARTS, FIELD SERVICE, AND TECHNICAL SUPPORT
- 12.5" (317.5 MM) WIDE HORIZONTAL BLADES WITH TOOL FREE REMOVAL
- HANDLES PRODUCT UP TO 5" (127 MM) IN HEIGHT AT ANY LENGTH, WITHOUT THE NEED FOR PRE-CUTTING. HORIZONTALLY SLICES PRODUCT FROM 1/4" (6.35 MM) UP TO 1" (25 MM) THICKNESS
- OPEN DESIGN AND FEWER PARTS REDUCE TEARDOWN, SANITATION AND REASSEMBLY TIME
- ULTRA-HYGIENIC DESIGN WITH OPEN STAINLESS STEEL CHANNELS (NO ENCLOSED TUBULAR FRAMING), SLOPED SURFACES, NO LAMINATION POINTS, ETC.
- ALLEN-BRADLEY HMI TOUCH SCREEN




HORIZONTAL SLICER FOR 3D CUTS

Our horizontal slicer is designed to be paired with our Carruthers DuraKut™ 6000 series 2D dicers, or can be used as a standalone unit, for 3D cuts of the highest quality. The system's continuous flow processing design allows for smooth integration in and out of any processing line so there is no need for batching. The DuraKut dicer's integrated product discharge belt then conveys finished product directly to a dump buggy or conveyor.



FEATURE	TECHNICAL SPECIFICATIONS
Nominal Belt Width:	12.5" (317.5 mm)
Infeed Belt Height:	38" (965.2 mm)
Temperature Range:	25° F (-3° C) to fully cooked from the oven
Slicing Range:	1/4" to 1" (6.35 to 25 mm)
Maximum Belt Speed:	40' (12 m) per minute
Feed Opening:	For product up to 5" (127 mm) in height x any length
Electrical:	220/380/415/440/480VAC, 3-Phase

TECHNICAL SPECIFICATIONS

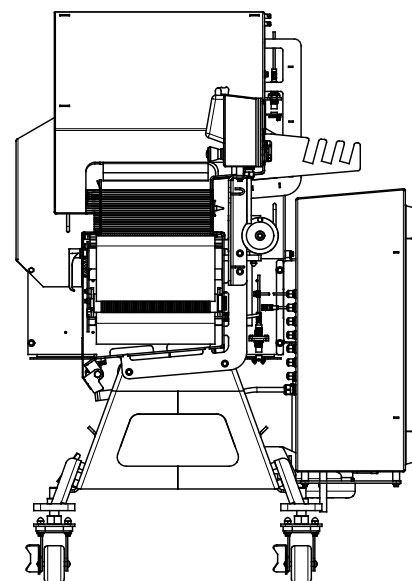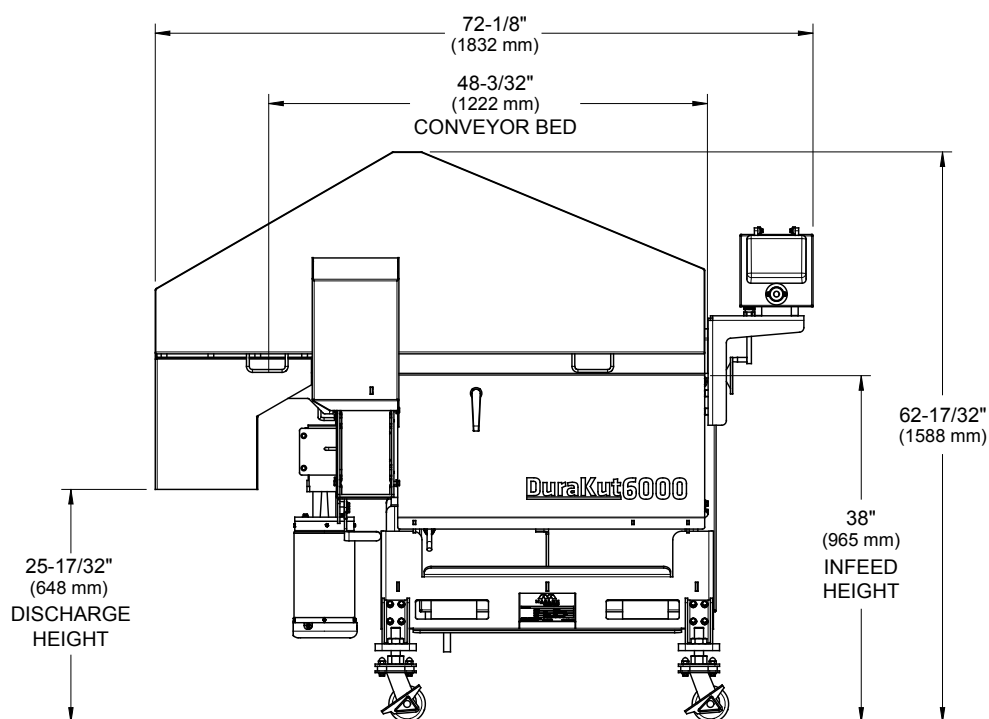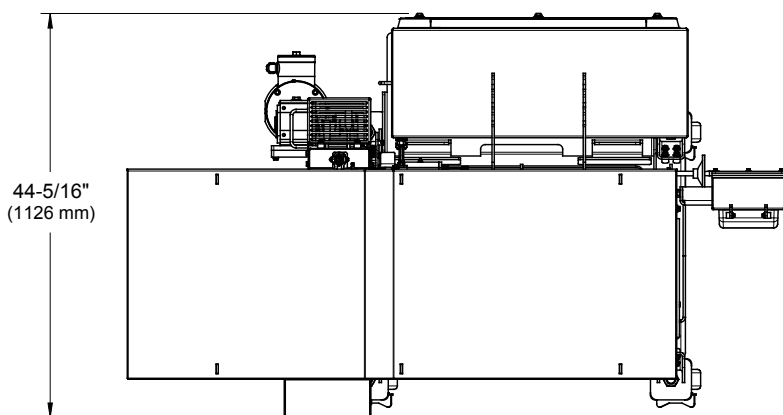

4780 NW 41ST ST, STE. 100 • RIVERSIDE, MO 64150

TEL 913.888.3333 | TOLL FREE 800.862.7536 | FAX 913.888.6440 | EMAIL: SALES@MARLEN.COM | WWW.MARLEN.COM



MARLEN INTERNATIONAL IS A MEMBER OF THE **DURAVANT** FAMILY OF COMPANIES

FOOD PROCESSING SOLUTIONS | PACKAGING SOLUTIONS | MATERIAL HANDLING SOLUTIONS | SUPPORTPRO

www.duravant.com